

## BULB REPLACEMENT INSTRUCTIONS


- 1. Unplug from power. Pull in light by cord and clean.
- 2. Make sure light is dry inside.
- 3. Remove wing-nuts, black flange, lens, old bulb and o-ring.
- 4. Clean and dry o-ring groove.
- 5. Install new o-ring into groove. Do not use any sealants or greases.
- 6. Install new bulb. *Handle bulb with a cloth*. Push pins back with small screw driver if necessary. Wiggle bulb back and forth to make sure bulb is seated correctly.
- 7. Replace lens and black flange.
- 8. Tighten wing nuts ¼ turn past hand-tight using pliers.
- 9. Back in the water and plug back in.

## **ENJOY!**

1. Push one end of bulb into socket

2. Pull back socket pin on other end with small screwdriver

> 3. Pivot other end of bulb down into socket

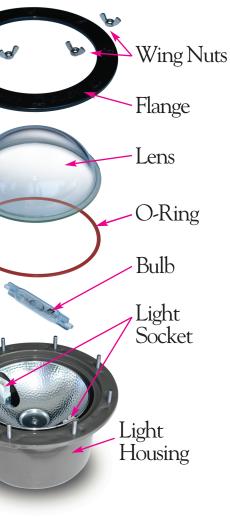

GFCI (ground fault circuit interrupter breakers)

## www.DeepGlow.com

Phone: 727.234.1334 Fax: 727.234.1335 Toll Free: 888.871.3334 Office Mailing Address: PO Box 55055 St Petersburg, FL 33732 Warehouse Shipping Address: 13131 56th Court, Suite 303 Clearwater, FL 33760